



18600PDL

Self-Contained Refrigerated Dual Rail Prep Table with Flush Mount LiquiTec® Raised Rails

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approved _____
Date _____

18600PDL Self-Contained Refrigerated Dual Rail Prep Table With Liquittec®

Models

- 18648PDL - 48" Dual Rail Prep Table with (4) 12"X20" pan openings
- 18672PDL - 72" Dual Rail Prep Table with (6) 12"X20" pan openings



18648PDL

Standard Features

- Upper and lower rails are mechanically cooled utilizing LiquiTec® technology with die stamped 12"X20" openings
- Top is constructed of 18-gauge stainless steel
- 22-gauge stainless steel ends are standard
- Pans and adapter bars by others
- 17" polyethylene cutting board is standard
- Flush mount NSF-7 certified pans
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Dart style quick change gaskets
- Stainless steel removable hinged covers
- On/off switch is located behind the louver
- 1.50" diameter hole in louver for easy access to rail on/off switch
- 8' long electrical cord
- Environmentally friendly HFC-404A refrigerant
- CE approved versions available as an

- option**
- One year parts and labor standard warranty

Options & Accessories

- Stainless steel back
- Laminate facing (full front), end and/or back
- Tray racks
- Remote refrigeration
- Variable cutting board types and sizes
- 6" (15cm) legs or casters
- Cheese grates with removable catch pans
- 27" wide refrigerated drawers (2) high, holds 6" deep pans
- Door/drawer locks
- Adapter bars and pans
- 220V/50 cycle electrical system
- Additional shelf

Specifications

Exterior Top: Constructed of one-piece 18-gauge stainless steel, with integral 3/12" (3.4cm) high square nosing at the front. Top has two mechanically cooled LiquiTec® refrigerated raised rails at the rear with openings to accommodate pans (provided by others). Rail interiors are 22-gauge stainless steel. Raised rail openings have 18-gauge stainless steel hinged removable lids. Unit is equipped with separate expansion valve and on/off switch for refrigerated rails. Temperature in top openings maintains 33°F (1°C) to 41°F (5°C) with pans flush mounted at 86°F (29.7°C) ambient room temperature, meeting NSF 7 requirements.

Exterior Back, Bottom and Ends: Unfinished galvanized steel back and bottom. Exterior ends are finished with 22-gauge stainless steel.

Base Interior: Stainless steel back and bottom. Base interior sides and door frames are thermoformed ABS plastic. Each interior door section has (1) 25" (63.3cm) deep removable epoxy coated wire shelf. Base is insulated with 2" (5.1cm) high

density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) foamed in place polyurethane. End of base has a machine compartment with condensing units installed.

Door(s): 22-gauge stainless steel exterior front, with a thermoformed ABS plastic interior liner.

Refrigeration System: HFC-404A refrigerant. Cabinet has (1) blower coil assembly with expansion valve on 48" and 72" models. Refrigerated base maintains temperature of 36°F (2°C) to 40°F (4°C). On/off switches for rail and base are located behind the louvered panel. A 1.50" diameter hole is in the louver for easy access to rail on/off switch.

Electrical Connections: 115 volt, 60 Hertz, single phase. Unit is wired with 3-wire, grounded, maximum 8' (2.4m) cord and plug.

Casters: Equipment is mounted on 4" (10cm) diameter casters.



980 S. Isabella Rd.
Mt. Pleasant, Michigan 48856


Phone: 800-733-8948 or 989-773-7961
Fax: 800-669-0619

www.delfield.com





18600PDL Self-Contained Refrigerated Dual Rail Prep Table with Flush Mount LiquiTec® Raised Rails

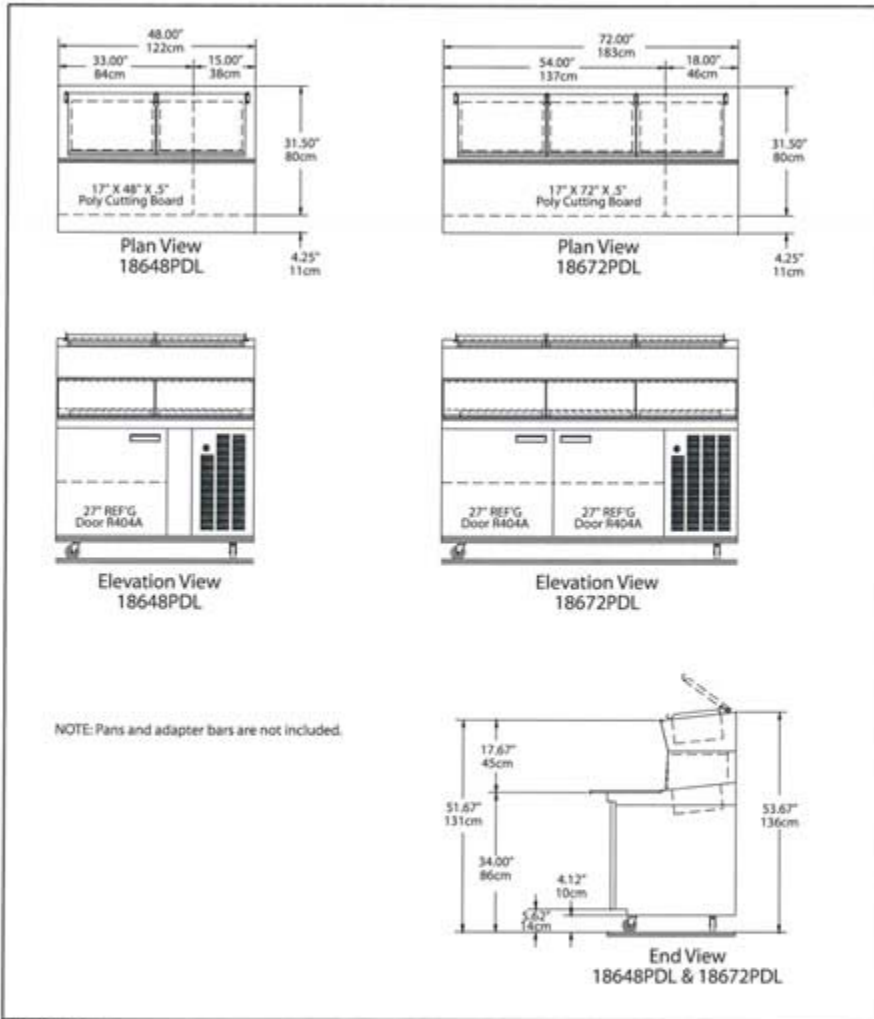

NOTE: Pans and adapter bars are not included.

Specifications

Model	1/3 Pan Capacity	# Of Shelves	Storage Capacity Ft ³	Shelf Area Ft ²	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight
18648PDL	12	1	9.38	3.95	1/5, 1/3	115/60/1	10.1	5-20P	691lbs
18672PDL	18	2	16.64	7.90	1/5, 1/2	115/60/1	12.7	5-20P	873lbs

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0819
www.delfield.com

Printed in the U.S.A.
DS18PDL
01/10



420 Westdale Avenue
Westerville, OH 43082

T 614.899.9500
800.492.7400
F 614.899.9797

I www.zinkmarketing.com
E info@zinkmarketing.com