

Glastender®

DIRECT DRAW KEG CAPACITIES




Front Serviced



IMPORTANT: Low Profile coolers cannot accommodate standard-height kegs with couplers installed. Standard-height kegs with couplers will only fit in Bar Profile coolers.

Door Openings

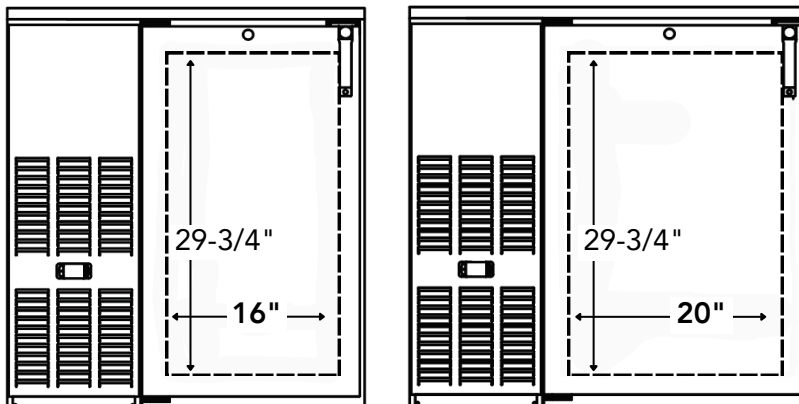

C1FB32, C1FB52,
C1FB72, C1FB92

C1FB36, C1FB60, KC72,
C1FB84, C1FB108

Front Serviced coolers feature a 16" or 20" door opening.

16" door opening models hold 1/4 bbl and 1/6 bbl kegs. They do **NOT** hold 1/2 barrels

20" door opening models fit 1/2 bbl, 1/4 bbl and 1/6 bbl kegs.

For more information please view our C1FB spec sheet.




Designer

Email sales@glastender.com for CAD files or
start designing your layout at <https://designer.glastender.com/>


Front Serviced



C1FB32 | 16" Door Opening

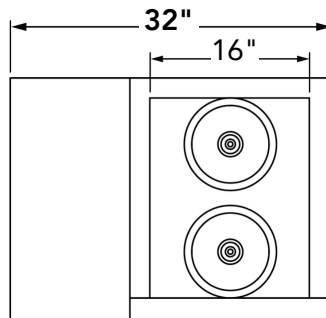


2 - 1/6 Barrels

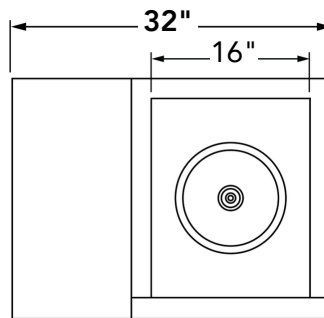


1 - 1/4 Barrel




C1FB36 | 20" Door Opening

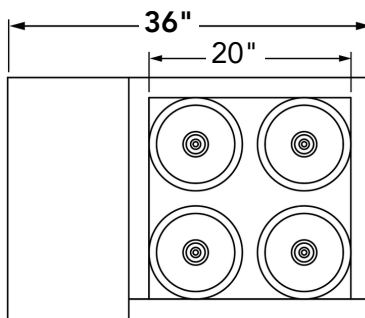

4 - 1/6 Barrels

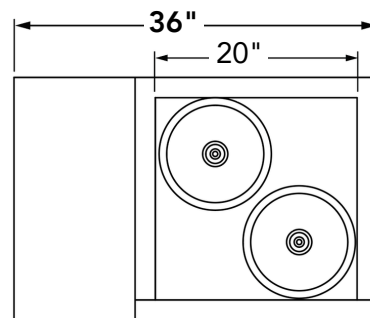

2 - 1/4 Barrels

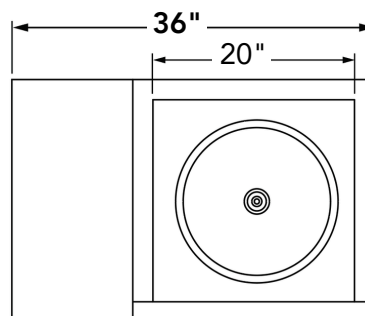


1 - 1/2 Barrel


Front Serviced



C1FB52 | 16" Door Opening

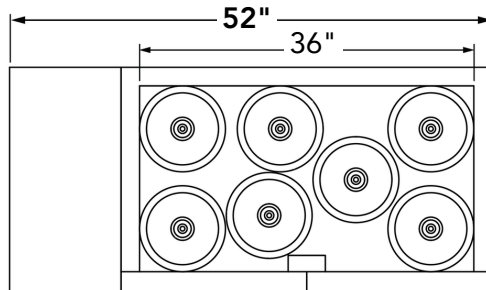


7 - 1/6 Barrels

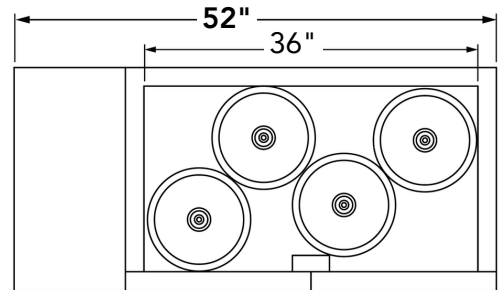


4 - 1/4 Barrels




C1FB60 | 20" Door Opening

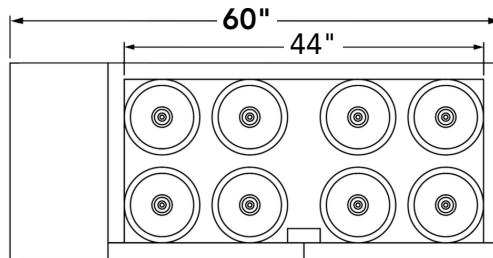

8 - 1/6 Barrels

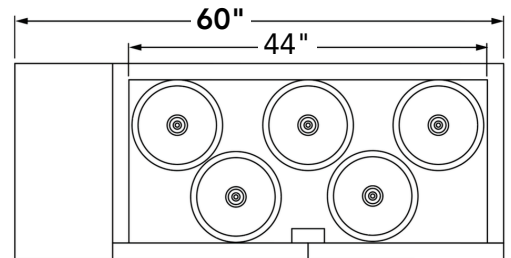


5 - 1/4 Barrels

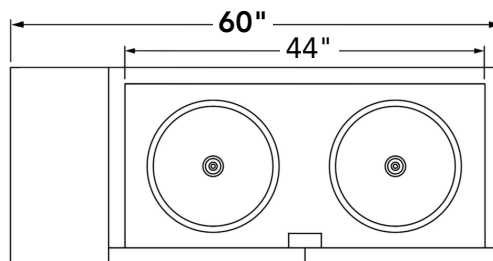


2 - 1/2 Barrels


Front Serviced

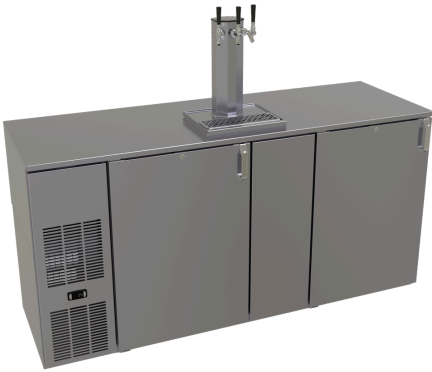


KC72 | 20" Door Opening

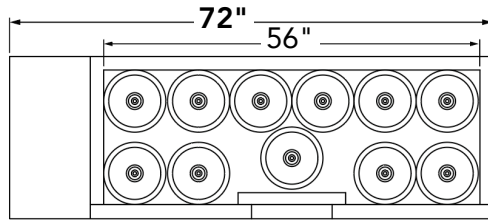


11 - 1/6 Barrels

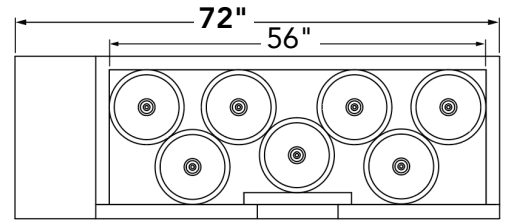


7 - 1/4 Barrels

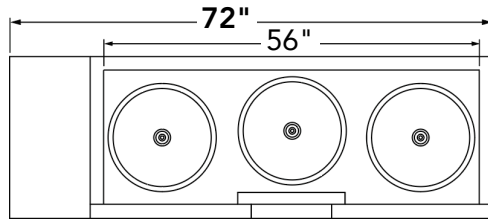


3 - 1/2 Barrels

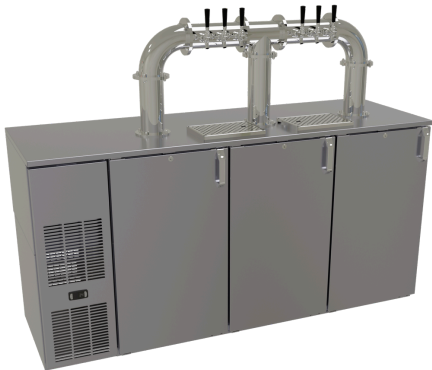

C1FB72 | 16" Door Opening

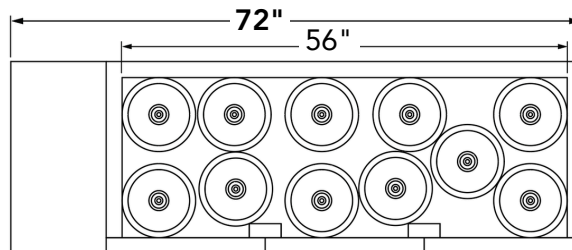


11 - 1/6 Barrels

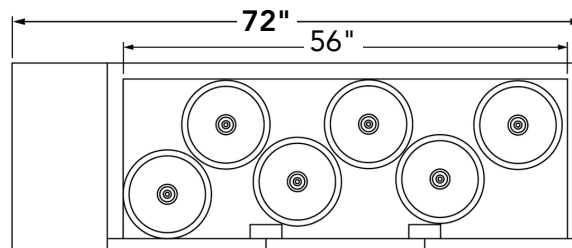


6 - 1/4 Barrels


Front Serviced

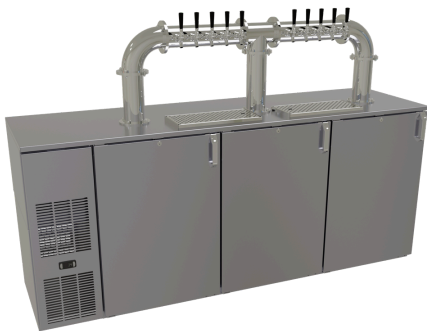


C1FB84 | 20" Door Opening

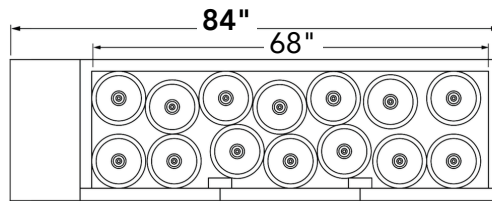


14 - 1/6 Barrels

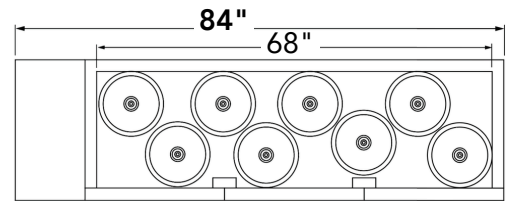


8 - 1/4 Barrels

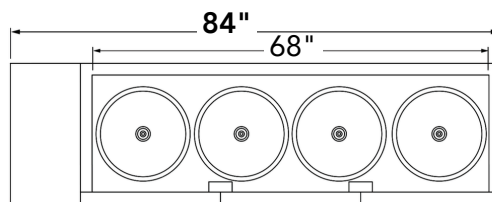


4 - 1/2 Barrels

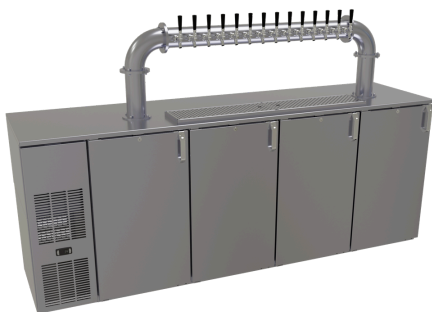

C1FB92 | 16" Door Opening

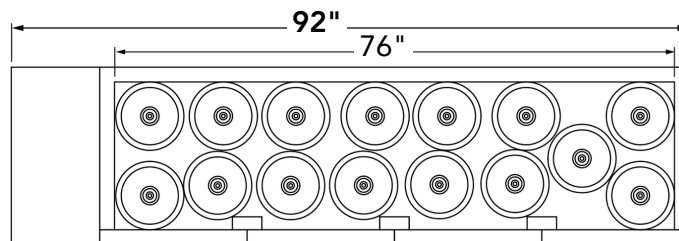


15 - 1/6 Barrels



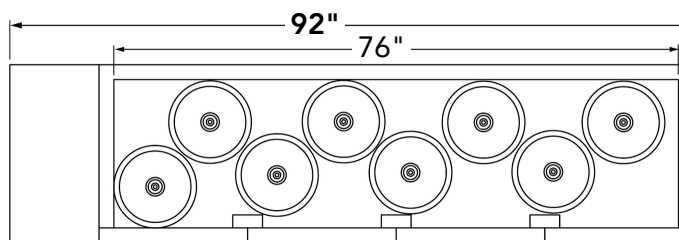


8 - 1/4 Barrels

Front Serviced

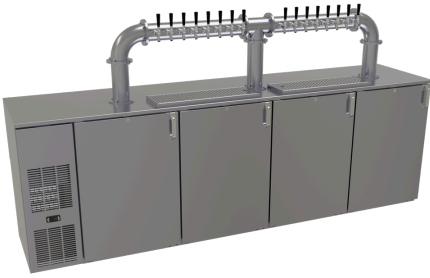

C1FB108 | 20" Door Opening

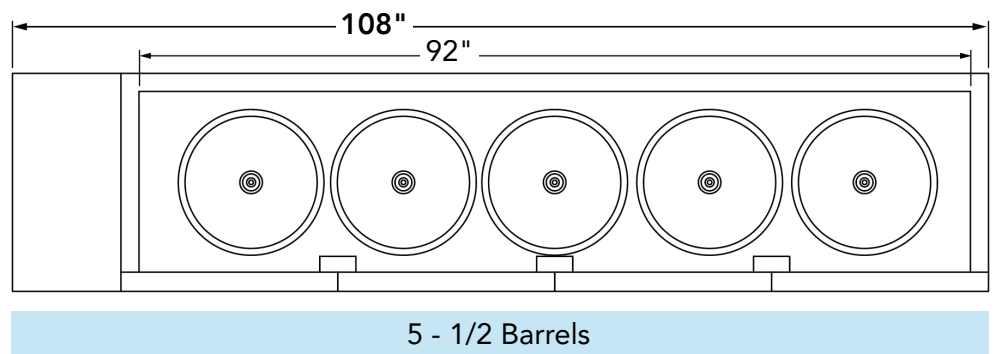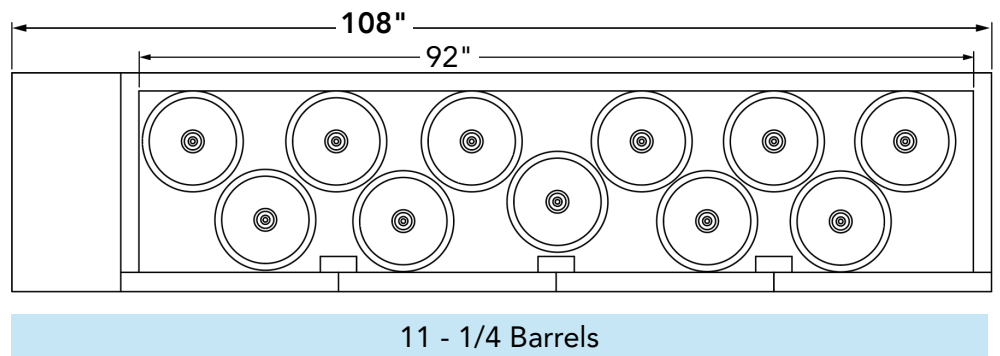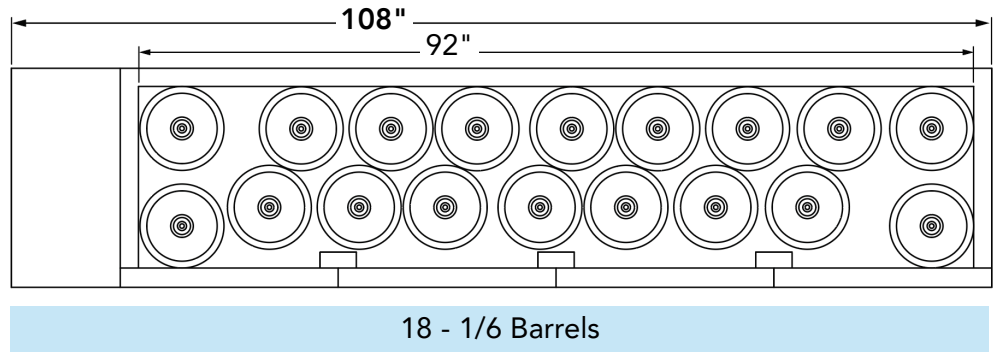


Side Serviced

Keg Sizes




IMPORTANT: Low Profile coolers cannot accommodate standard-height kegs with couplers installed. Standard-height kegs with couplers will only fit in Bar Profile coolers.


Door Openings

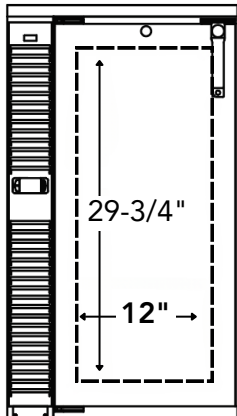


C1SB20, C1SB36

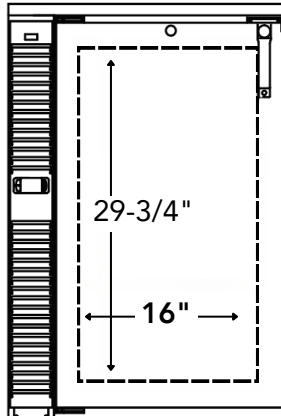


C1SB44

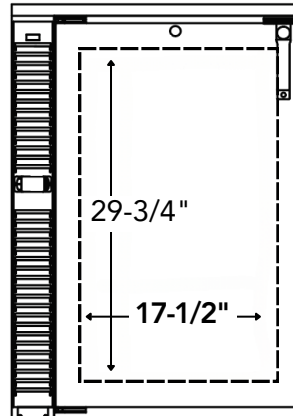

C1SB24

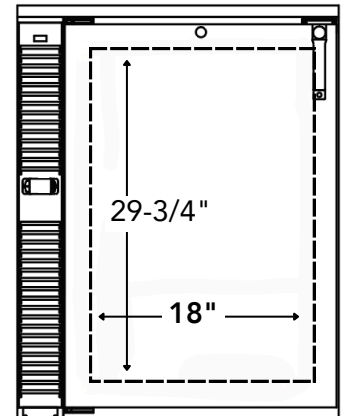

C1SB48

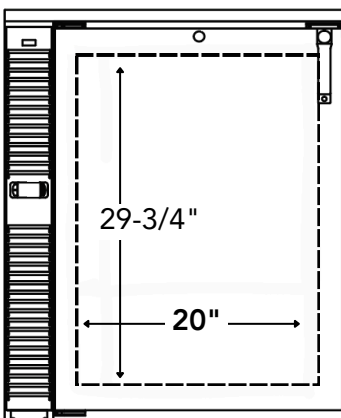

C1SB28

Side Serviced coolers feature a 12", 16", 17-1/2", 18, or 20" door openings.

12" and 16" door openings do **NOT** hold 1/2 barrels.

17-1/2", 18" and 20" door opening models fit 1/2 bbl, 1/4 bbl, and 1/6 bbl kegs.


For more information please view our C1SB spec sheet.

Side Serviced




C1SB20 | 12" Door Opening

For (2) 1/6 kegs, one keg must have a low profile keg tap (05001026).

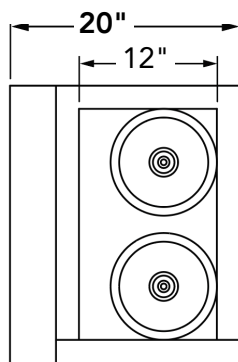

2 - 1/6 Barrels

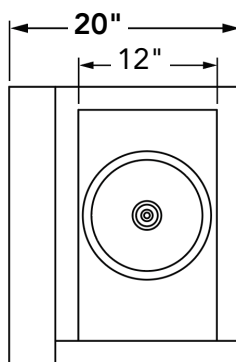


1 - 1/4 Barrel




C1SB24 | 17-1/2" Door Opening


For (3) 1/6 kegs, one keg must have a low profile keg tap (05001026).



3 - 1/6 Barrels



1 - 1/4 Barrel




1 - 1/2 Barrel

Side Serviced




C1SB28 | 20" Door Opening


For (4) 1/6 kegs, two kegs must have a low profile keg tap (05001026).



4 - 1/6 Barrels



2 - 1/4 Barrels




1 - 1/2 Barrel




C1SB36 | 12" Door Opening

For (5) 1/6 kegs, two kegs must have a low profile keg tap (05001026).

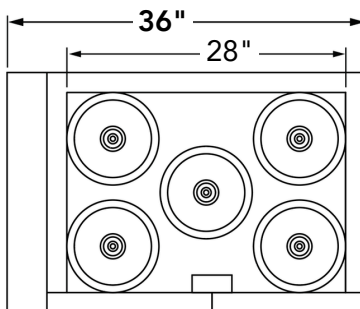

5 - 1/6 Barrels

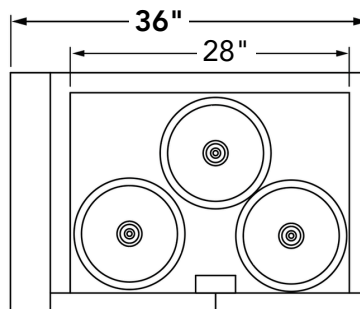


3 - 1/4 Barrels

Side Serviced




C1SB44 | 16" Door Opening

For (7) 1/6 kegs, two kegs must have a low profile keg tap (05001026).

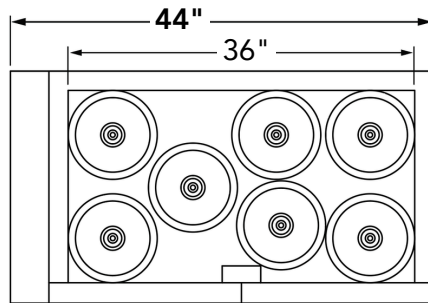

7 - 1/6 Barrels

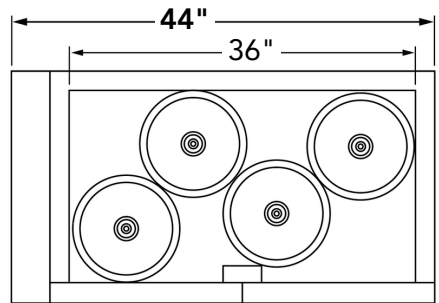


4 - 1/4 Barrels




C1SB48 | 18" Door Opening


For (8) 1/6 kegs, two kegs must have a low profile keg tap (05001026).

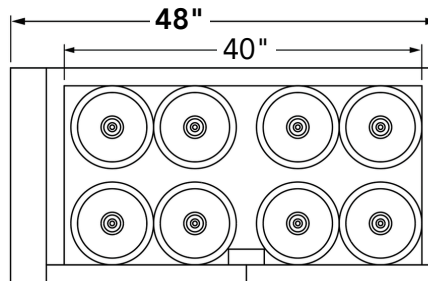

8 - 1/6 Barrels

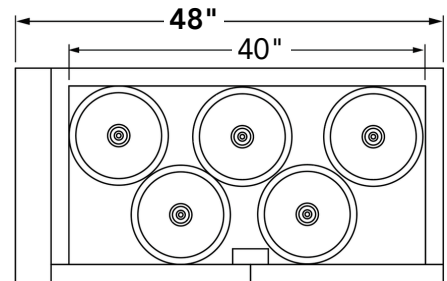

5 - 1/4 Barrels

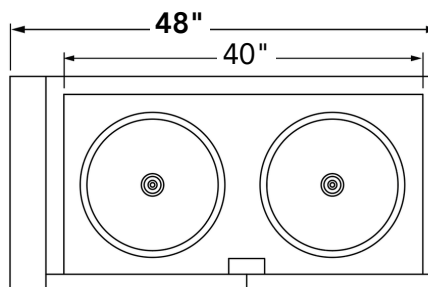

2 - 1/2 Barrels



Glastender®

www.glastender.com | marketing@glastender.com

20260616